




Imaging Solutions

400 mA and 500 mA Cost Effective Generators With No Compromise in Quality Outperforms Traditional 300 mA Generators

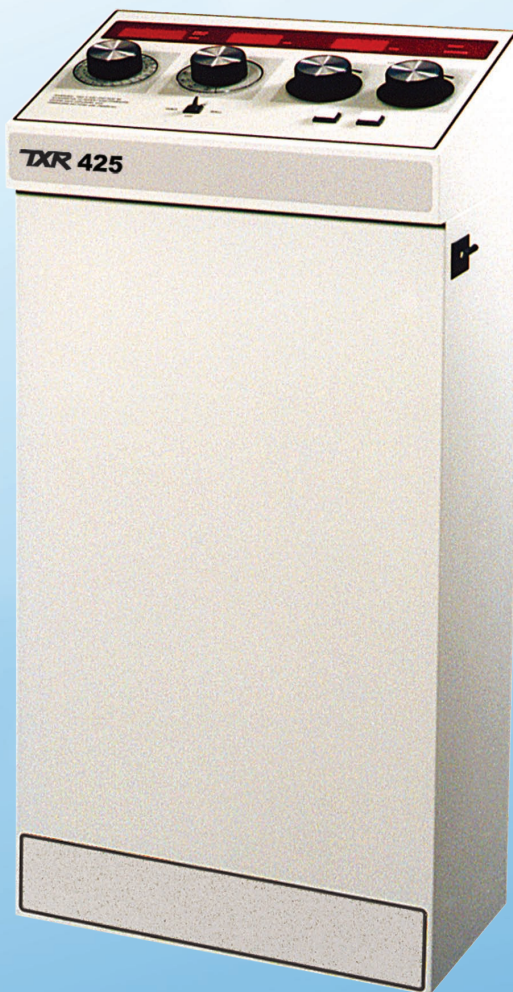

**TXR 425 and TXR 525
Generators**

35 Years of Proven Reliability

TXR microprocessor controlled generators are designed with accuracy, safety, reliability, quality and ease of use in mind. Our proven design has made the TXR generators popular world-wide, with thousands currently in use.

A choice of two models with output of 400 mA or 500 mA deliver added penetrating power accommodating patients that conventional 300 mA generators cannot accommodate. The added power allows use of shorter time to stop motion, delivering sharper images.

Combine the TXR 425 or TXR 525 generator with one of our many choices of tables, tube stands and wall stands to configure a system meeting the needs and budget of any practice. TXR generators are ideally suited to replace existing outdated generators.

Standard Features Include

- Digital Displays of kVp, mA and mAs
- kVp Selection of 50 to 125 kVp in 1 kV Increments
- Automatic Line Compensation
- Tube Protect
- Self Diagnostics
- 1/120th to 6 Second Timing
- ETL Listed, UL/CAN/CSA/FDA
- 5 Year Warranty

Option

- 50 Hz Operation

Tingle X-Ray LLC

5481 Skyland Blvd.,E • Cottondale, AL 35453 • Phone 205-556-3803 • FAX 205-556-3824
1-800-897-9729 • www.txr.com • sales@www.txr.com

Complies with FDA and Product Safety Requirements. • Specifications Subject to Change Without Notice • Made in USA

TECHNICAL SPECIFICATIONS

	TXR 425	TXR 525
KW Rating	40	50
mA Output	400 (400 mA at 100 kVp)	500 (500 mA at 100 kVp)
Timer Range	1/120th to 6 Seconds	1/120th to 6 Seconds
mA Stations	6 – 50/100S, 150/200/300/400L	7 – 50/100S, 150/200/300/400/500L
mAs Range	.4 – 600	.4 – 600
kVp Range	50 to 125	50 to 125
Power Line	208/240 VAC, 1 Phase 5% Regulation	208/240 VAC, 1 Phase 5% Regulation
Wire Size (distribution to disconnect)	50' #2, 100' #00 200' 250 mcm	50' #2, 100' #00 200' 250 mcm
Maximum Momentary Current	160 Amp (80 Amp Breaker)	180 Amp (90 Amp Breaker)
Control Dimensions	37"H x 18"W x 12"D (94 cm x 46 cm x 30 cm)	37"H x 18"W x 12"D (94 cm x 46 cm x 30 cm)
Control Weight	150 Lbs. (68 kg)	150 Lbs. (68 kg)
Transformer Dimensions	19"H x 18"W x 20"D (48 cm x 46 cm x 51 cm)	19"H x 18"W x 20"D (48 cm x 46 cm x 51 cm)
Transformer Weight	325 Lbs. (147 kg)	325 Lbs. (147 kg)



TXR Mission Statement

Provide prompt delivery of reliable,

high quality X-ray equipment to meet the needs of our customers.



Tingle X-Ray LLC

5481 Skyland Blvd., E • Cottondale, AL 35453 • Phone 205-556-3803 • FAX 205-556-3824
1-800-897-9729 • www.txr.com • sales@www.txr.com

Complies with FDA and Product Safety Requirements. • Specifications Subject to Change Without Notice • Made in USA